
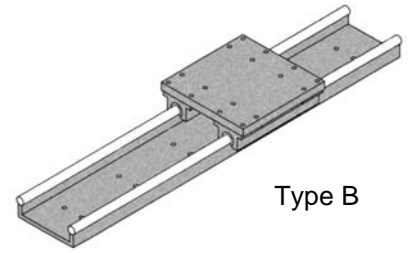
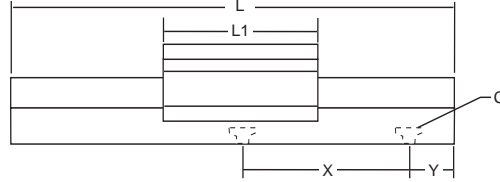


SSB - Double Wide Pillow Blocks

Travel length is calculated by subtracting the carriage plate length (L1) from the total system length (L).

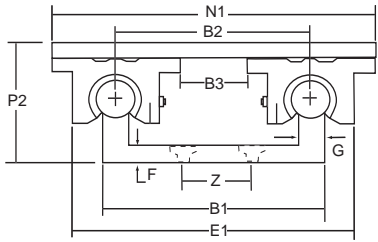

Type B

Unit: inch

| Part No. | Dia. | Max. Load * (lbs.) | L | L1 | B1 | B2 | B3 | E1 | X | Y | Z | C Thru Hole / Bolt Size | F | G | N1 | P2 |
|----------|-------|--------------------|-----------|------|------|------|------|------|------|--------|------|-------------------------|------|------|------|------|
| SSB-08 | 0.500 | 740 | See Below | 3.50 | 2.56 | 2.31 | 0.31 | 3.69 | 4.00 | 2.00** | 0.75 | 0.28 / 1/4 | 0.25 | 0.25 | 4.50 | 2.00 |
| SSB-10 | 0.625 | 1280 | | 4.00 | 3.00 | 2.68 | 0.25 | 4.44 | 4.00 | 2.00** | 0.88 | 0.28 / 1/4 | 0.37 | 0.37 | 5.25 | 2.25 |
| SSB-12 | 0.750 | 1500 | | 4.50 | 3.63 | 3.25 | 0.50 | 5.13 | 6.00 | 3.00 | 1.00 | 0.34 / 5/16 | 0.37 | 0.37 | 6.00 | 2.50 |
| SSB-16 | 1.000 | 2720 | | 6.00 | 5.00 | 4.50 | 1.25 | 6.90 | 6.00 | 3.00 | 1.25 | 0.41 / 3/8 | 0.47 | 0.47 | 7.75 | 3.00 |

* Based on a travel of 2 million inches & bearing capacity.

** For 18", 30" and 42" system lengths subtract 1" of "Y" dimension.

Unit: inch

| System Type | Standard System Lengths (L) | | | | | | |
|-------------|-----------------------------|----|----|----|----|----|----|
| SSB | 12 | 18 | 24 | 30 | 36 | 42 | 48 |

| | Travel | | | | | | | |
|--------|--------|------|------|------|------|------|------|--|
| SSB-08 | 8.5 | 14.5 | 20.5 | 26.5 | 32.5 | 38.5 | 44.5 | |
| SSB-10 | 8.0 | 14.0 | 20.0 | 26.0 | 32.0 | 38.0 | 44.0 | |
| SSB-12 | 7.5 | 13.5 | 19.5 | 25.5 | 31.5 | 37.5 | 43.5 | |
| SSB-16 | 6.0 | 12.0 | 18.0 | 24.0 | 30.0 | 36.0 | 42.0 | |

Simple Slide Type B Carriage Dimensions

Unit: inch

| Part No. | Dia. | C | L1 | M | M1 | J1 | J2 | J3 | N1 |
|----------|-------|---------|------|------|------|------|------|------|------|
| SSB-08 | 0.500 | 1/4-20 | 3.50 | 2.50 | 1.00 | 0.37 | 2.00 | 0.75 | 4.50 |
| SSB-10 | 0.625 | 1/4-20 | 4.00 | 2.75 | 1.25 | 0.37 | 2.50 | 0.75 | 5.25 |
| SSB-12 | 0.750 | 5/16-18 | 4.50 | 3.25 | 1.38 | 0.50 | 3.00 | 0.75 | 6.00 |
| SSB-16 | 1.000 | 3/8-16 | 6.00 | 4.50 | 1.63 | 0.50 | 4.00 | 1.00 | 7.75 |

