


TWJ & TWJ-W SERIES ADJUSTABLE SINGLE & DOUBLE WIDE

TWJ

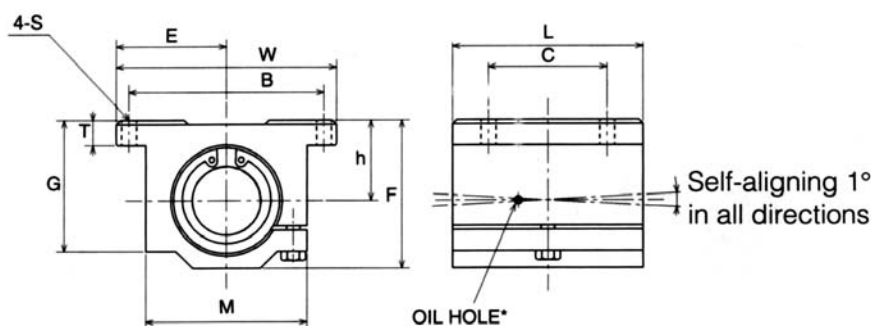


Unit: inch

Part No.	Size	Load Rating		Overall Dimensions								Mounting Dim.			Wt lbs.
		Dynamic C (lbs.)	Static Co (lbs.)	h ±0.0012	E ±0.0012	W	L	F	T	G	M	B ±0.01	C ±0.01	S	
TWJ4UU	0.250	60	80	0.4370	0.8125	1.625	1.188	0.813	0.188	0.750	1.000	1.312	0.750	0.156	0.090
TWJ6UU	0.375	95	120	0.5000	0.8750	1.750	1.313	0.938	0.188	0.875	1.125	1.437	0.875	0.156	0.120
TWJ8UU	0.500	230	290	0.6870	1.0000	2.000	1.688	1.250	0.250	1.125	1.375	1.688	1.000	0.156	0.248
TWJ10UU	0.625	400	500	0.8750	1.2500	2.500	1.938	1.625	0.281	1.437	1.750	2.125	1.125	0.188	0.466
TWJ12UU	0.750	470	590	0.9370	1.3750	2.750	2.063	1.750	0.313	1.563	1.875	2.375	1.250	0.188	0.553
TWJ16UU	1.000	850	1060	1.1870	1.6250	3.250	2.813	2.188	0.375	1.938	2.375	2.875	1.750	0.219	1.200
TWJ20UU	1.250	1230	1530	1.5000	2.0000	4.000	3.625	2.813	0.438	2.500	3.000	3.500	2.000	0.219	2.380
TWJ24UU	1.500	1480	1850	1.7500	2.3750	4.750	4.000	3.250	0.500	2.875	3.500	4.125	2.500	0.281	3.460
TWJ32UU	2.000	2430	3040	2.1250	3.0000	6.000	5.000	4.063	0.625	3.625	4.500	5.250	3.250	0.406	6.830

* Provided with push-in oil fitting for 1/4" to 1/2" sizes. Sizes from 5/8" to 2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.

TWJ-W

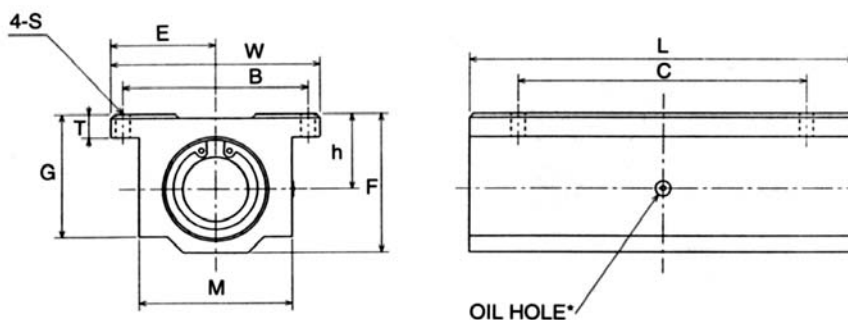

Unit: inch

Part No.	Size	Load Rating		Overall Dimensions								Mounting Dim.			Wt lbs.
		Dynamic C (lbs.)	Static Co (lbs.)	h ±0.0012	E ±0.0012	W	L	F	T	G	M	B ±0.01	C ±0.01	S	
TWJ4WUU	0.250	96	160	0.4370	0.8125	1.625	2.50	0.813	0.188	0.750	1.000	1.312	2.000	0.156	0.19
TWJ6WUU	0.375	150	240	0.5000	0.8750	1.750	2.75	0.938	0.188	0.875	1.125	1.437	2.250	0.156	0.25
TWJ8WUU	0.500	370	580	0.6870	1.0000	2.000	3.50	1.250	0.250	1.125	1.375	1.688	2.500	0.156	0.51
TWJ10WUU	0.625	640	1000	0.8750	1.2500	2.500	4.00	1.625	0.281	1.437	1.750	2.125	3.000	0.188	1.00
TWJ12WUU	0.750	750	1180	0.9370	1.3750	2.750	4.50	1.750	0.313	1.563	1.875	2.375	3.500	0.188	1.20
TWJ16WUU	1.000	1360	2120	1.1870	1.6250	3.250	6.00	2.188	0.375	1.938	2.375	2.875	4.500	0.219	2.40
TWJ20WUU	1.250	1970	3060	1.5000	2.0000	4.000	7.50	2.813	0.438	2.500	3.000	3.500	5.500	0.219	5.00
TWJ24WUU	1.500	2370	3700	1.7500	2.3750	4.750	9.00	3.250	0.500	2.875	3.500	4.125	6.500	0.281	7.80

* Provided with push-in oil fitting for 1/4" to 1/2" sizes. Sizes from 5/8" to 2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.